
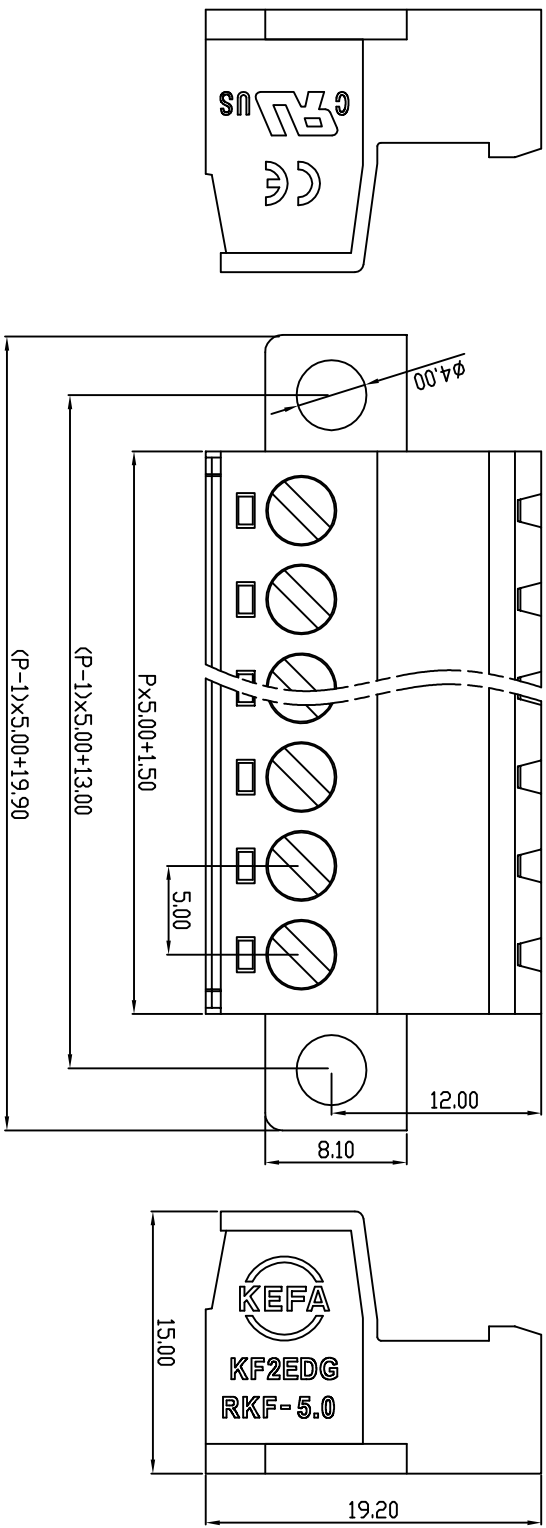


linear dimension (Tolerances Standard GB/T 14486-2008)										—		
variable range	6 to 6	over 10 to 10	over 30 to 30	over 60 to 60	over 100 to 100	over 160 to 160		over 10 to 10	over 100 to 100			
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

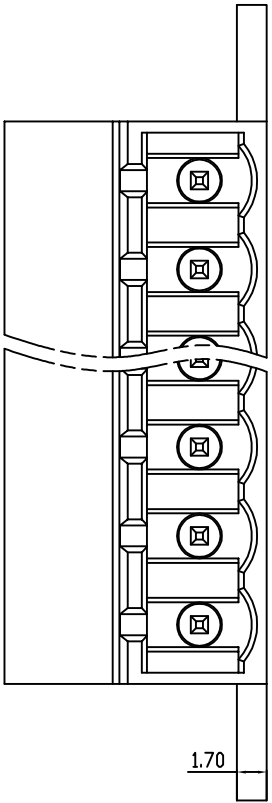

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	22.02.21

UL/CUL 技术参数							
UL/CUL Technical Data							
等级	Use Group	B	C	D			
额定电压	Rated Voltage	V	300	-	300		
额定电流	Rated Current	A	10	-	10		
接线范围	Wire Range	24-12					
单/多芯线	Solid/Stranded						AWG
耐电压	Withstanding Voltage						AC1600V/1Min
IEC 技术参数							
IEC Technical Data							
过电压类别	Overvoltage Category	III	III	II			
污染等级	Contamination Class	3	2	2			
额定电压	Rated Voltage	V	-	320	630		
额定电流	Rated Current	A	-	15	15		
额定冲击电压	Impulse withstand voltage	kV	-	4.0	4.0		
导线截面积	Conductor cross section	2.5					
硬质/柔性导线	Solid/flexible						mm ²
材料							
绝缘材料	Insulation Material	PA66					
阻燃等级	Inflammability						
导体材料	Conductor Material	铜合金 Copper alloy					
导体表面镀层	Conductive Coating	镀锡 Tin Plated					
一般参数 Other Data							
间距 Pitch	mm	5.0/5.08					
极数 Poles	P	2-24P					
剥线长度 Stripping Length	mm	7-8					
螺丝 Screw/扭矩 Torque(Max)	N.m	M2.5/0.4					
工作温度 Operating temperatur	°C	-40~+105					
引脚尺寸 Pin Dimensions	mm	-					
PCB板孔径 PCB Hole Diameter	mm	-					

DES.	SJD	DATE	22.02.21	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION			
CHK.	BY	DATE	22.02.21	KEFA® 慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD								版本 / REV	A
APP.	CLF	DATE	22.02.21							名称 / TITLE		KF2EDGRKF-5.0	