




linear dimension(Tolerances Standard GB/T 14486-2008)

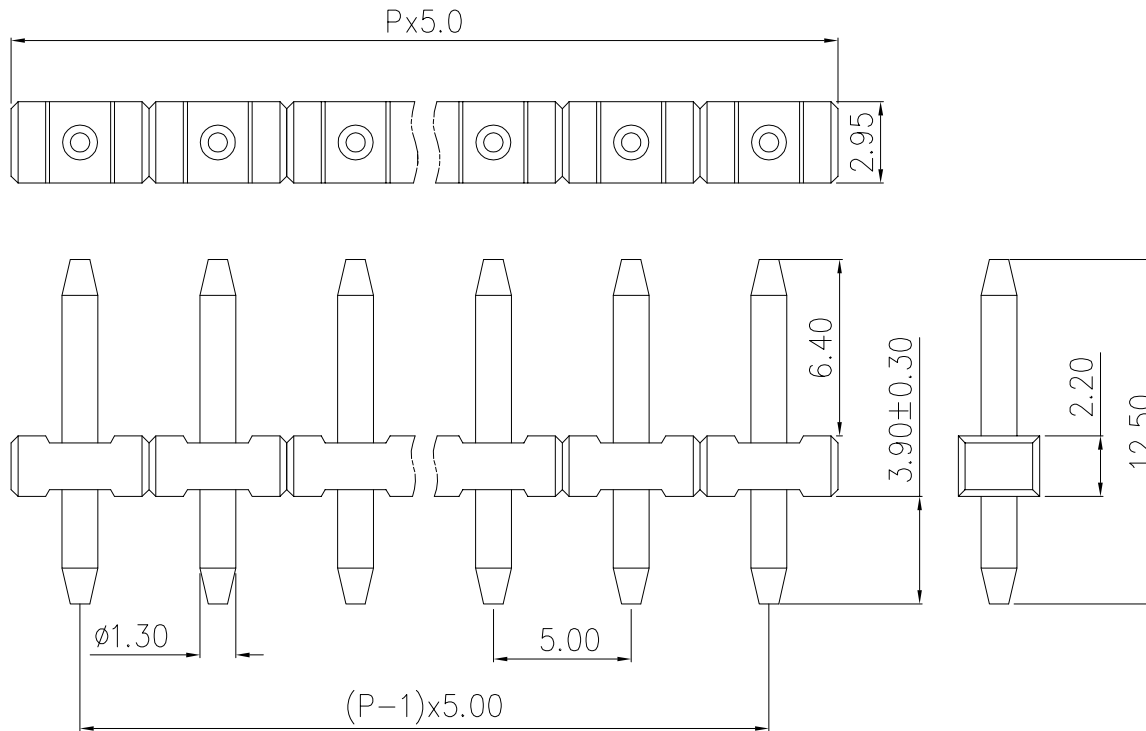

variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to	
	6	10	30	60	100	160	10	100		
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

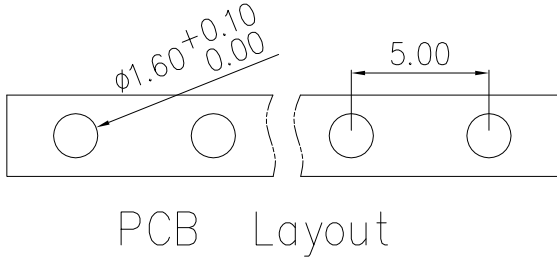

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	23.07.12

UL/CUL 技术参数		UL/CUL Technical Data					
等级	Use Group						
额定电压	Rated Voltage [V]	300	-	300			
额定电流	Rated Current [A]	10	-	10			
接线范围	Wire Range	-					
单/多芯线	Solid/Stranded [AWG]						
耐电压	Withstanding Voltage	1600V/1Min					
IEC 技术参数		IEC Technical Data					
过电压类别	Overvoltage Category						
污染等级	Contamination Class	3	2	2			
额定电压	Rated Voltage [V]	200	320	500			
额定电流	Rated Current [A]	17	17	17			
额定冲击电压	Impulse withstand voltagea [KV]	2.5	4	4			
导线截面积	Conductor cross section	-					
硬质/柔性导线	Solid/flexible [mm ²]						
材料		Material					
绝缘材料	Insulation Material	PBT					
阻燃等级	Inflamability	UL94V-0					
导体材料	Contacting Material	铜合金 Copper alloy					
导体表面镀层	Contactive Coating	镀锡 Tin Plated					
一般参数		Other Data					
间距	Pitch [mm]	5.0					
极数	Poles [P]	01-24					
剥线长度	Stripping Length [mm]	-					
螺丝	Screw/扭矩 Torque(Max) [N.m]	-					
工作温度	Operating temperatur [°C]	-40~+105					
引针尺寸	Pin Dimensions [mm]	3.9					
PCB板孔径	PCB Hole Diameter [mm]	1.6					

DES.	LQQ	DATE	23.07.12	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	A
CHK.	BY	DATE	23.07.12	慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD	名称 / TITLE		KF332J-5.0					
APP.	CLF	DATE	23.07.12									